

Center joist + breaker divider

- +1 center joist at x=11'-6" framing (16'-0" in 2 seg; hangers at ledger, mid-girder, outer-rim)
- +1 center divider / breaker board (MoistureShield Vision PF stock, 5.4"W x 16'-0" y-direction, x=11'-9" finish)
- Decking now 11'-9" + 11'-9" per row — butt against breaker on both sides at x=11'-9" finish
- Decking material change: was ~49 x 16-ft planks; now ~72 x 12-ft planks cut to 11'-9"

23'-0" framing (center joist)

Breaker
5.4" wide

7'-8" pier spacing (typ.)
11'-9" (left PF edge → breaker CL)

11'-9" (breaker CL → right PF edge)

HOUSE WALL ▲ NORTH (23'-6" overall edge)

HOUSE-SIDE PF — 5.4" MoistureShield Vision | 23' 6" long | Butted at house wall | Butted corners (inside

CENTER JOIST
x=11'-6" framing
(x=11'-9" finish)
2x10 PT — 2 seg
Hangers: ledger +
mid-girder + outer-rim

**CENTER DIVIDER
(BREAKER BOARD)
MoistureShield Vision
5.4" x 16'-0"
y-direction
Butt joint on both sides**

Pylex 50 helical pier
+ 10555 saddle (typ.)
8 piers total

MID-GIRDER — Doubled 2x10 PT SYP | y=8'-0" | 23'-0" long

4 JOISTS @ 12" o.c. + 1 CENTER JOIST @ x=11'-6" framing (y-dir, 2 seg each) — 50 segments total

outer rim / outer-girder $y=16'-0"$

SEASONAL HEAVE NOTE (Hollis): shallow precast blocks WILL heave 1/4-1/2" per cycle.

This is a decorative/convenience step, NOT frost-depth founded.

Homeowner has accepted this trade-off. Tiger Claw TC-G or Cortex fasteners

4 (outside	gravel pad beyond $y=16'-3"$
---------------	---------------------------------

-28° 00'

23'-6" x 16'-3" Overall Finished Surface (patio = 23'-6" x 16'-6")

MoistureShield Vision | Decking || House | 4-Side Picture Frame + Center Breaker

L-edge step: 42" wide @ 6'-0" | Far-edge step: 11'-9" @ right corner

House on 23'-6" Edge NORTH

Scale: 1" = 1 ft (plot units = ft)

HOUSE = top edge

Date: 2026-05-09

Gemma — Technical Diagramming Specialist

LEDGER: ½" HDG carriage bolts, back-blocked from basement,

clustered at joist connections; 1/2" HDG lag at 18" OC two-row staggered

between connections (IRC R507.9.1.3). Wall = wood-frame, no masonry.

```
breaker divider;
```

er both sides)

v17 FRAMING SUMMARY

Footprint:	23'-0" x 16'-3" overall (PF outer to PF outer)
Framing:	23'-0" x 16'-0"
Ledger:	Full-width at y=0, x-direction
Mid-girder:	Doubled 2x10 PT SYP [y=8'-0" 23'-0" long
Outer-rim girder:	Doubled 2x10 PT SYP [y=16'-0" 23'-0" long
Pier saddle:	Pylex 10555 (3.5" saddle) + shims – fits doubled 2x10
Piers:	8 total (4 per girder) @ x=0, 7'-8", 15'-4", 23'-0"
Pier span:	7'-8" (within DCA 6 limit of 8'-9" at 8'-0" joist span)
Joints:	24 x 2x10 PT SYP @ 12' o.c. [y-direction 2 seg PLUS center joint]
Center joint:	24 x 10 PT [x=11'-6" framing (x=11'-9" finish) 2 segments]
Joist spans:	8'-0" each (seg A: ledger to mid-girder; seg B: mid to rim)
Center breaker:	MoistureShield Vision 5.4" x 16'-0" [y-direction x=11'-9" finish
Decking:	MoistureShield Vision 5.4" House [2x 11'-9" halves per row – 72 x 12" planks cut to 11'-9" (left & right halves)

LEGEND — v17

Field plank — 5.4" MoistureShield Vision (composite, capped)
Runs parallel to house (x-direction) | Butt joint @ x=11'-6" over joist

Picture-frame (PF) — 5.4" MoistureShield Vision, all 4 sides
L-side PF interrupted at L-edge step opening (y=6'-0" to y=9'-6")

Girder — Doubled 2x10 PT SYP | x-direction | 2 girder lines
Mid @ y=8'-0", Outer-rim @ y=16'-0" | Fits Pylex 3.5" saddle

Joist — 2x10 PT SYP | y-direction | 24 joists @ 12" o.c.
2 segments each | face-hung to ledger, mid-girder, outer-rim


Pylex 50 helical pier + 10555 saddle — 8 total

CENTER JOIST (v17 new) — 2x10 PT | x=11'-6" framing
Between 11'-0" and 12'-0" joists | hangers at ledger, mid-girder, outer-rim

CENTER BREAKER (v17 new) — MoistureShield Vision 5.4
Runs y-direction @ x=11'-9" finish | 16'-0" long | PF stock

FR-EDGE STEP — SIDE ELEVATION (unchanged from v14)

FR-EDGE STEP — SIDE ELEVATION (unchanged from v14)

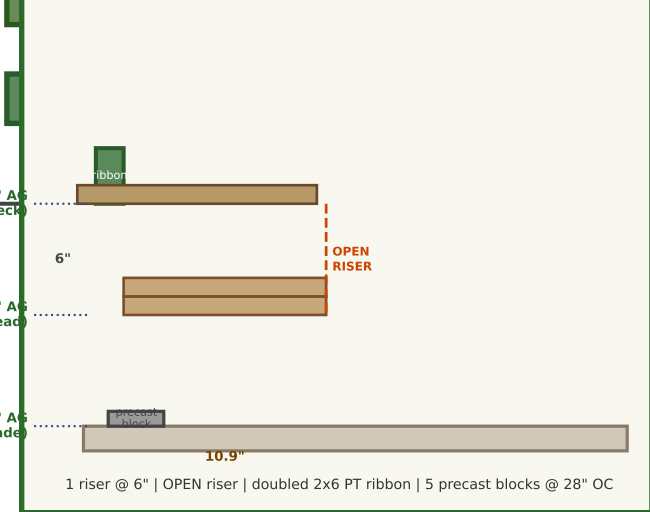

LEFT-EDGE STAIR — SIDE ELEVATION (unchanged from v14)

